


**Proportional pressure relief valve
Screw-in cartridge**

- Direct operated
- $Q_{\max} = 8 \text{ l/min}$
- $p_{\max} = 350 \text{ bar}$
- $p_{N \max} = 315 \text{ bar}$

M18x1,5
ISO 7789

DESCRIPTION

Direct operated proportional pressure relief valve as a screw-in cartridge with a thread M18x1,5 for cavity according to ISO 7789. Four standard pressure ranges are available: 20, 100, 200 and 315 bar. Good flow performance thanks to the differential area principle. Small leak along the poppet guide. Adjustmend by a Wandfluh proportional solenoid (VDE standard 0580). The cartridge and the solenoid made of steel are zinc coated and therefore rust-protected.

FUNCTION

The valve limits the pressure in port P (1) and reliefs the volume flow to tank port T (2). The back pressure in T (2) influences the pressure in P (1). When the operating pressure set by the proportional solenoid is reached, the poppet spool opens and connects the protected line to the tank T (2). These pressure relief valves are built according to the differential spool principle and are therefore very sensitive adjustable over the whole pressure range and also suitable for systems with extremely low minimum pressures. Wandfluh proportional amplifiers are available to control the proportional pressure relief valve (register 1.13).

APPLICATION

The valve has its application in hydraulic systems, in which the pressure frequently has to be changed. The facility for remote control and signal processing from process control systems enable elegant, comfortable solutions to problems. Installation of the screw-in cartridge in control blocks as well as in the Wandfluh sandwich plates (vertical stacked systems) and flange valves of the NG3-Mini types. (Please note the separate data sheets in register 2.3). Cavity tools are available for machining the cavities in steel and aluminium (hire or purchase). Please refer to the data sheets in register 2.13.

TYPE CODE

		B	D	P	PM18	-		-		#	
Pressure relief valve											
Direct operated											
Proportional											
Screw-in cartridge M18x1,5											
Nominal pressure range p_N	20 bar						20				
	100 bar						100				
	200 bar						200				
	315 bar						315				
Nominal voltage U_N	12 VDC						G12				
	24 VDC						G24				
Design-Index (Subject to change)											

GENERAL SPECIFICATIONS


Description	Direct operated proportional pressure relief valve
Construction	Screw-in cartridge for cavity to ISO 7789
Operations	Proportional solenoid
Mounting	Screw-in thread M18x1,5
Ambient temperature	-20...50 °C
Mounting position	any
Fastening torque	$M_D = 30 \text{ Nm}$ for screw-in cartridge $M_D = 1,2 \text{ Nm}$ (qual. 8.8) for solenoid screws
Weight	$m = 0,25 \text{ kg}$

ELECTRICAL SPECIFICATIONS

Construction	Proportional solenoid, wet pin push type, pressure tight.	
Standard-Nominal voltage	$U_N = 12 \text{ VDC}$	$U_N = 24 \text{ VDC}$
Limiting current	$I_G = 1080 \text{ mA}$	$I_G = 540 \text{ mA}$
Relative duty factor	100% DF (see data sheet 1.1-430)	
Protection class	IP 65 acc. to EN 60 529	
Connection/Power supply	Over device plug connection to ISO 4400/DIN 43 650 (2P+E)	
Other electrical specifications	see data sheet 1.1-90 (PI29V)	


HYDRAULIC SPECIFICATIONS

Fluid	Mineral oil, other fluid on request
Contamination efficiency	ISO 4406:1999, class 18/16/13 (Required filtration grade $\beta_{6...10} \geq 75$) see data sheet 1.0-50/2
Viscosity range	12 mm ² /s...320 mm ² /s
Fluid temperature	-20...+70 °C
Peak pressure	$p_{\max} = 350 \text{ bar}$
Nominal pressure ranges	$p_N = 20 \text{ bar}$, $p_N = 100 \text{ bar}$, $p_N = 200 \text{ bar}$, $p_N = 315 \text{ bar}$
Min. volume flow	$Q_{\min} = 0,1 \text{ l/min}$
Max. volume flow	$Q_{\max} = 8 \text{ l/min}$ für $p_N = 20/100 \text{ bar}$ $Q_{\max} = 6 \text{ l/min}$ für $p_N = 200 \text{ bar}$ $Q_{\max} = 3 \text{ l/min}$ für $p_N = 315 \text{ bar}$
Leakage volume flow	see characteristics
Repeatability	$\leq 1\%$ *
Hysteresis	$\leq 2\%$ *
	* at optimal dither signal


SYMBOL


CHARACTERISTICS oil viscosity $\nu = 30 \text{ mm}^2/\text{s}$


$p = f(Q)$ Pressure volume flow characteristics
(Maximum adjustable pressure)

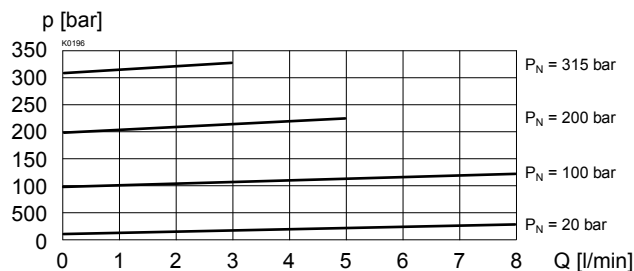


$p = f(I)$ Pressure adjustment characteristics
($Q = 1 \text{ l/min}$)

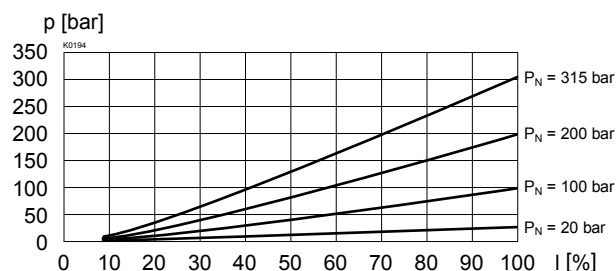


$p = f(Q)$ Pressure volume flow characteristics
(Minimum adjustable pressure)

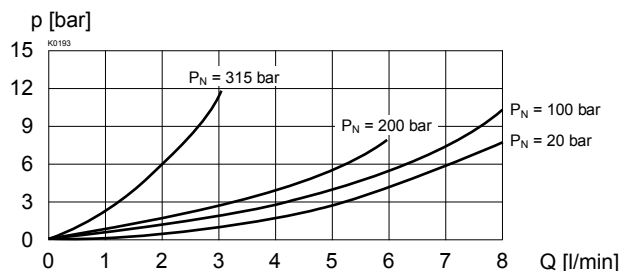


$Q_L = f(p)$ Leakage volume flow characteristics

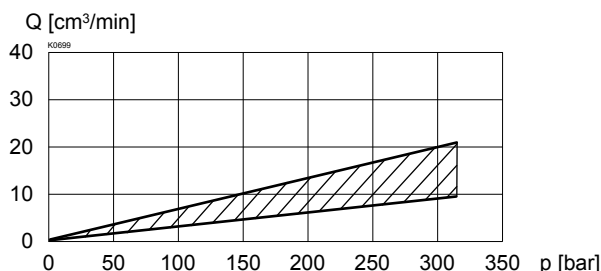

DIMENSIONS / SECTIONAL DRAWINGS

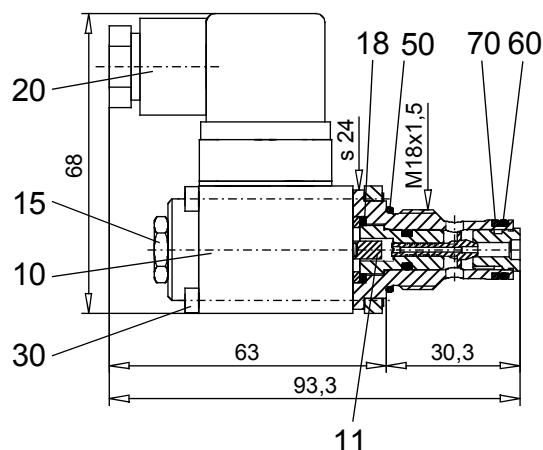

Cavity drawing according to
ISO 7789-18-02-0-98

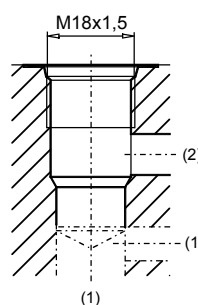

For detailed cavity drawing
and cavity tools see data
sheet 2.13-1001

PARTS LIST

Position	Article	Description
10	256.2453 256.2418	Proportional solenoid PI29V-G24 Proportional solenoid PI29V-G12
11	034.0111	Pin RD 4x10,1
15	253.8000	Mounted screw with integrated manual override HB4,5
18	160.2120	O-ring ID 12,42x1,78
20	219.2002	Plug (black)
30	249.0006	Socket head cap screw M3x42
50	160.2156	O-ring ID 15,60x1,78
60	160.2093	O-ring ID 9,25x1,78
70	049.3137	Back up ring RD 10,6x13,5x1,4

ACCESSORIES

Flange-/sandwich plate NG3-Mini	Data sheet 2.3-700
Line mount body	Data sheet 2.9-200
Proportional amplifier	Register 1.13
Mating connector EN 175301-803	Article Nr. 219.2002

Technical explanation see data sheet 1.0-100